


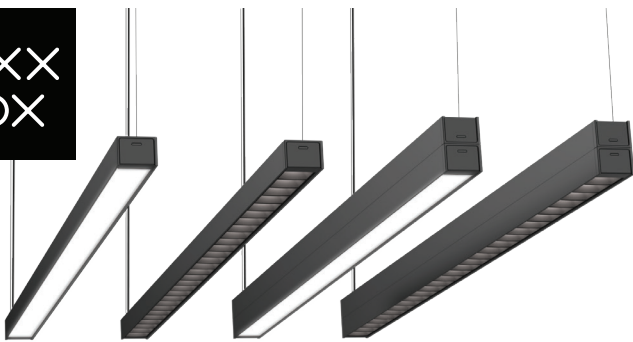

LINEA NAKED (LX-NL)

TYPE: LX-NL-

KEY FEATURES


- High performance dimmable LED light source with 3 direct output options.
- Available in multiple lengths
- UGR <5 on direct louvered output
- 2 available finishes: Black and Silver
- Height adjustable 9' / 3m suspension cables and Black woven power cable
- IES / LDT photometric files available
- Declare-listed

OPTIONAL EXTRAS


- Additional options available upon request:
- POE
 - Casambi Bluetooth controller (US)
 - Tunable White output
 - White canopy and power cord
 - Surface mounting option
 - Connecting bracket for longer runs.
 - BABA Act Certificate

SIZE AND OUTPUT

SIDE VIEW

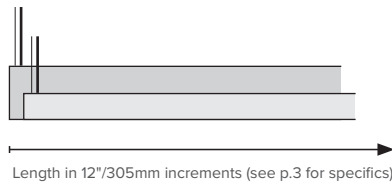


FRONT VIEW




OPTICS


Louvered (DA/DB)



Diffused (DC)




Lensed (I)




FINISHES

Black (B)



Silver (S)



OUTPUT: PER METER | PER FOOT

	Delivered Lumen Output (per meter per foot)			Beam Angle		Wattage (W/m W/ft)	Efficacy (lm/W)	CRI	UGR	CCT
	DOWN	UP	TOTAL	DOWN	UP					
DA	3420 lm/m 1060 lm/ft	-	3420 lm/m 1060 lm/ft	50°	-	26W/m 8W/ft	133	90+	<5	3000K 3500K 4000K
DB	3326 lm/m 1031 lm/ft	-	3326 lm/m 1031 lm/ft	76°	-	26W/m 8W/ft	129		<5	
DC	2620 lm/m 812 lm/ft	-	2620 lm/m 812 lm/ft	100°	-	40W/m 13W/ft	75.5		<19	
I	-	3113 lm/m 965 lm/ft	3113 lm/m 965 lm/ft	-	160°	26W/m 8W/ft	121		-	
DIA	3420 lm/m 1060 lm/ft	3113 lm/m 965 lm/ft	6533 lm/m 2025 lm/ft	50°	160°	52W/m 16W/ft	127		<5	
DIB	3326 lm/m 1031 lm/ft	3113 lm/m 965 lm/ft	6439 lm/m 1996 lm/ft	76°	160°	52W/m 16W/ft	125		<5	
DIC	2620 lm/m 812 lm/ft	3113 lm/m 965 lm/ft	5733 lm/m 1777 lm/ft	100°	160°	65W/m 21W/ft	94.7		<19	

More detailed photometric info for specific module lengths is shown on p.3

ORDER CODE

EXAMPLE: LX - NL - 8 - B - 40 - DIA - G - RD

(Luxbox Linea Naked, Length 8 (2261mm / 89"), Black finish, 4000K, Direct A + Indirect output, Global 220-240V 1% DSi/DALI dimming, Remote driver)

LX - NL						
PRODUCT CODE	LENGTH	FINISH	COLOR TEMP	OUTPUT*	REGION / DIMMING	DRIVER TYPE
NL	Use length code as shown on pg. 3	B S Black Silver	30 35 40 3000K 3500K 4000K	DA Direct A (50°, louvered) DB Direct B (76°, louvered) DC Direct C (100°, Lensed) I Indirect (160°, Lensed) DIA Direct A + Indirect DIB Direct B + Indirect DIC Direct C + Indirect	UNV 110-277V 0-10V - 1% dimming (North America) G** 220-240V 1% dimming DSi/DALI	CD Canopy concealed driver (UNV/North America) RD Remote driver (UNV or G)


*See p.2 for more information about the different Output options | ** Global (G) dimming type is available with Remote driver (RD) only

Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. November 2025. LX-Linea-Naked-Spec-Sheet_A4 v14.2



LUXBOX USA INC
(P)+1 (415) 871 0448 × USA@LUXBOX.COM
WWW.LUXBOX.COM



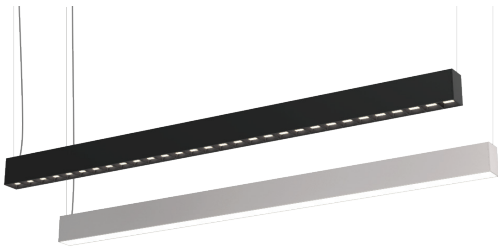

LINEA NAKED (LX-NL)


TYPE: LX-NL-

PHOTOMETRICS: PER METER / FOOT

LIGHT SOURCE SPECIFICATIONS - PER METER / FOOT

	Delivered Lumen Output (per meter per foot)			Beam Angle		Wattage (W/m W/ft)	Efficacy (lm/W)	CRI	UGR	CCT
	DOWN	UP	TOTAL	DOWN	UP					
DA	3420 lm/m 1060 lm/ft	-	3420 lm/m 1060 lm/ft	50°	-	26W/m 8W/ft	133	90+	<5	3000K 3500K 4000K
DB	3326 lm/m 1031 lm/ft	-	3326 lm/m 1031 lm/ft	76°	-	26W/m 8W/ft	129		<5	
DC	2620 lm/m 812 lm/ft	-	2620 lm/m 812 lm/ft	100°	-	40W/m 13W/ft	75.5		<19	
I	-	3113 lm/m 965 lm/ft	3113 lm/m 965 lm/ft	-	160°	26W/m 8W/ft	121		-	
DIA	3420 lm/m 1060 lm/ft	3113 lm/m 965 lm/ft	6533 lm/m 2025 lm/ft	50°	160°	52W/m 16W/ft	127		<5	
DIB	3326 lm/m 1031 lm/ft	3113 lm/m 965 lm/ft	6439 lm/m 1996 lm/ft	76°	160°	52W/m 16W/ft	125		<5	
DIC	2620 lm/m 812 lm/ft	3113 lm/m 965 lm/ft	5733 lm/m 1777 lm/ft	100°	160°	65W/m 21W/ft	94.7		<19	

LUMINOUS INTENSITY DISTRIBUTION

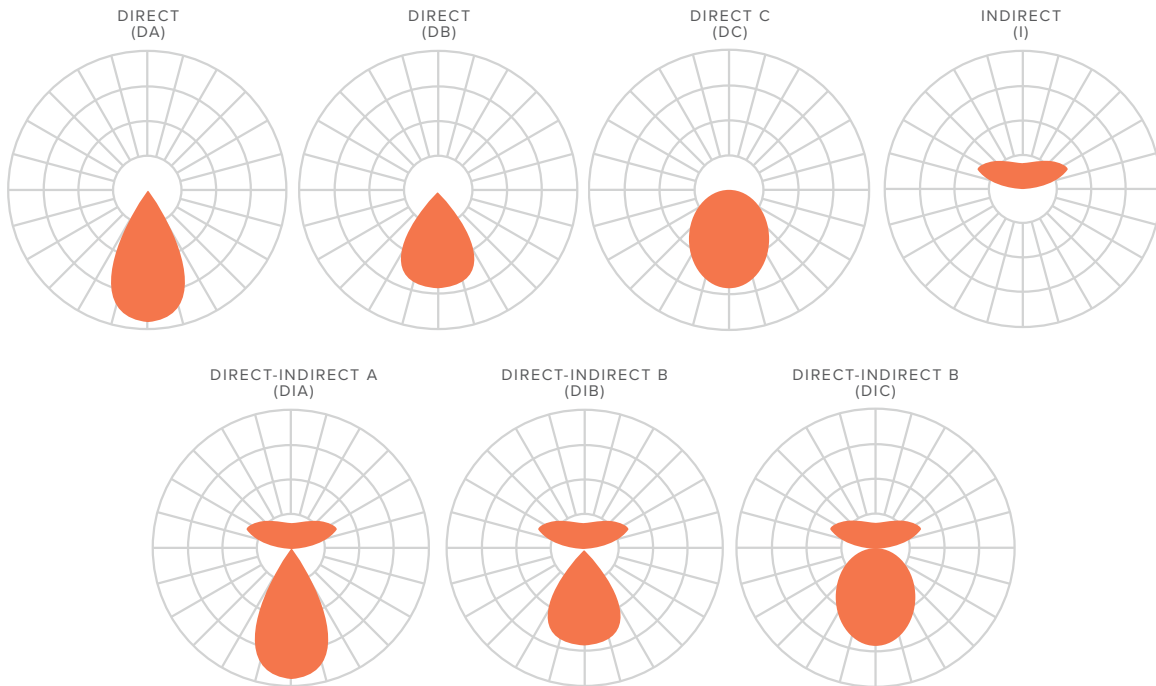


TM-30

Fidelity Index (Rf): Average similarity to the reference source for all colors
Gamut Index (Rg): Average change in chroma for all colors

	DA / DB
Fidelity Index (Rf)	83
Gamut Index (Rg)	96

COLOR VECTOR GRAPHIC

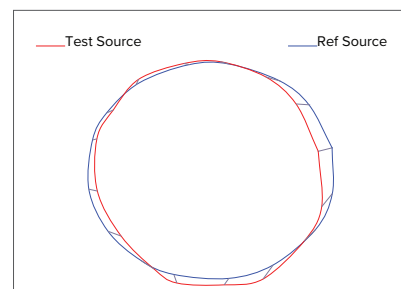


DA / DB / DC / I

Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. November 2025. LX-Linea-Naked-Spec-Sheet_A4 v14.2



LUXXBOX USA INC
(P)+1 (415) 871 0448 × USA@LUXXBOX.COM
WWW.LUXXBOX.COM



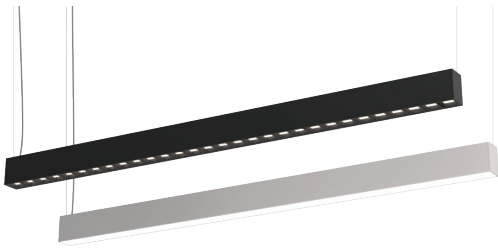


LINEA NAKED (LX-NL)

TYPE: LX-NL-

PHOTOMETRICS: SPECIFIC LENGTHS

OUTPUT: SPECIFIC MODULES AND LENGTHS

Please see below table and diagram indicating Overall Lengths (OL) and Output data for all Linea Naked Modules.






	OVERALL LENGTH (OL)		DA		DB		DC		I		DIA		DIB		DIC	
	in	mm	Lumens (lm)	Wattage (W)	Lumens (lm)	Wattage (W)	Lumens (lm)	Wattage (W)	Lumens (lm)	Wattage (W)	Lumens (lm)	Wattage (W)	Lumens (lm)	Wattage (W)	Lumens (lm)	Wattage (W)
NL-2	22.8	580	2120	16	2062	16	1624	21.5	1930	16	4050	32	3992	32	3554	37.5
NL-3	33.9	860	3180	24	3093	24	2436	32	2895	24	6075	48	5988	48	5331	56
NL-4	44.9	1140	4240	32	4124	32	3248	42.5	3860	32	8100	64	7984	64	7108	74.5
NL-5	55.9	1420	5300	40	5155	40	4060	53	4825	40	10125	80	9980	80	8885	93
NL-6	67.0	1701	6360	48	6186	48	4872	63.5	5790	48	12150	96	11976	96	10662	111.5
NL-7	78.0	1981	7420	56	7217	56	5684	74	6755	56	14175	112	13972	112	12439	130
NL-8	89.0	2261	8480	64	8248	64	6496	84.5	7720	64	16200	128	15968	128	14216	148.5

SUSPENSION POINTS AND POWER LOCATIONS

The location of the suspension points is always at the same distance from the nearest end of the module. The location of the power point is always at the same distance from the nearest end of the modules. Please see table and diagram below for more detailed information.

STAND-ALONE MODULE

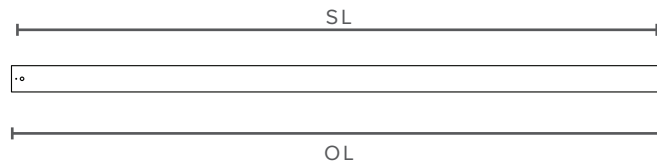

	in				mm			
	OL	SL	SE	PE	OL	SL	SE	PE
NL-2	22.8	21.9	0.12	0.31	580	574	3	8
NL-3	33.9	32.9			860	854		
NL-4	44.9	43.9			1140	1134		
NL-5	55.9	55.0			1420	1414		
NL-6	67.0	66.0			1701	1695		
NL-7	78.0	77.0			1981	1975		
NL-8	89.0	88.1			2261	2255		

LEGEND:


- OL: Overall Length of the module
- SL: Distance between Suspension Points
- SE: Distance between the suspension point and the closest end of the module
- PE: Distance between the power point and the closest end of the module

Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. November 2025. LX-Linea-Naked-Spec-Sheet_A4 v14.2



LUXBOX USA INC
(P)+1 (415) 871 0448 × USA@LUXBOX.COM
WWW.LUXBOX.COM



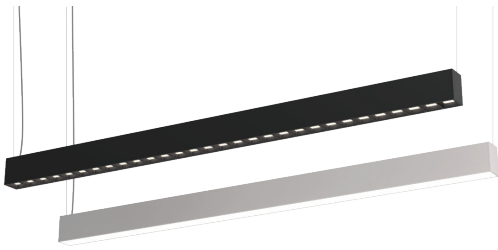

LINEA NAKED (LX-NL)

TYPE: LX-NL-


DRIVER INFORMATION

		MAX WATTAGE (W)				MAX VOLTAGE (V)	COMPLIANCE
		DA / DB	DC	DIA / DIB	DIC		
UNIVERSAL (UNV) 0-10V - 1% dimming 110 - 277 VAC (North America only)	NL-2	16 W	21 W	32 W	37 W	40V	  
	NL-3	24 W	31.5 W	48 W	55.5 W		
	NL-4	32 W	42 W	64 W	74 W		
	NL-5	40 W	52.5 W	80 W	92.5 W		
	NL-6	48 W	63 W	96 W	111 W		
	NL-7	56 W	73.5 W	112 W	129.5 W		
	NL-8	64 W	84 W	128 W	148 W		
GLOBAL (G) 1% DSI/DALI dimming 220 - 240 VAC	NL-2	16 W	21 W	32 W	37 W	40V	    
	NL-3	24 W	31.5 W	48 W	55.5 W		
	NL-4	32 W	42 W	64 W	74 W		
	NL-5	40 W	52.5 W	80 W	92.5 W		
	NL-6	48 W	63 W	96 W	111 W		
	NL-7	56 W	73.5 W	112 W	129.5 W		
	NL-8	64 W	84 W	128 W	148 W		

CANOPY INFORMATION

Please note power cord and canopy will always be supplied in black unless specified otherwise. As you can see on the diagrams, Linea Naked pendants are supplied with a canopy that includes both a Power Cable and a Suspension Cable. The Suspension Cable is centered with the canopy for an easier installation.

			OUTPUT & LENGTHS APPLICABLE			
REGION/DIMMING	DRIVER TYPE	CANOPY	DA / DB	DC	DIA / DIB	DIC
UNV	CD	CD5	LX-NL-2 to LX-NL-6	LX-NL-2 to LX-NL-4	LX-NL-2 to LX-NL-3	LX-NL-2
		CD9R	LX-NL-7 to LX-NL-8	LX-NL-5 to LX-NL-8	LX-NL-4 to LX-NL-8	LX-NL-3 to LX-NL-8
	RD	SA5	All	All	All	All
G	RD	SB4	All	All	All	All

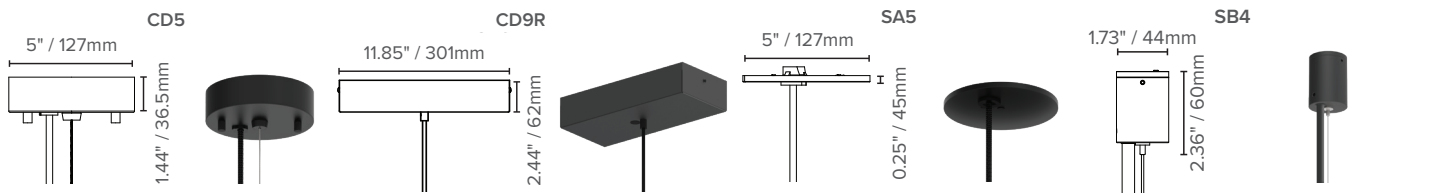

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. November 2025. LX-Linea-Naked-Spec-Sheet_A4 v14.2



LUXXBOX USA INC
(P)+1 (415) 871 0448 × USA@LUXXBOX.COM
WWW.LUXXBOX.COM

